



Specification

1. Model No.:

HCL-PAR38UL-X1

2. Features:

- Compliance with USA and Canada safety requirements, cULus listed, file No. E352810.
- New version of PAR38 high power spotlight adopts 2W LED as light source, with features of high efficiency, energy-saving, and long life span etc.
- We use advanced fin-circle buckled technology for our PAR38 high power spotlight, solder the fins and the aluminum light body together, so the light can radiate heat through high density fins, cool the high temperature of the light, decrease the LED decay and improve the lifetime.
- Regular lamp holder, easy installment.
- The goods works on standard dimmers smoothly.

3. Application:


- Widely applied in public area and meeting room of hotels as can lights.
- Used as spotlight in shopping mall and private house.

4. Picture:






5. Dimension(Unit:mm,±0.5mm):

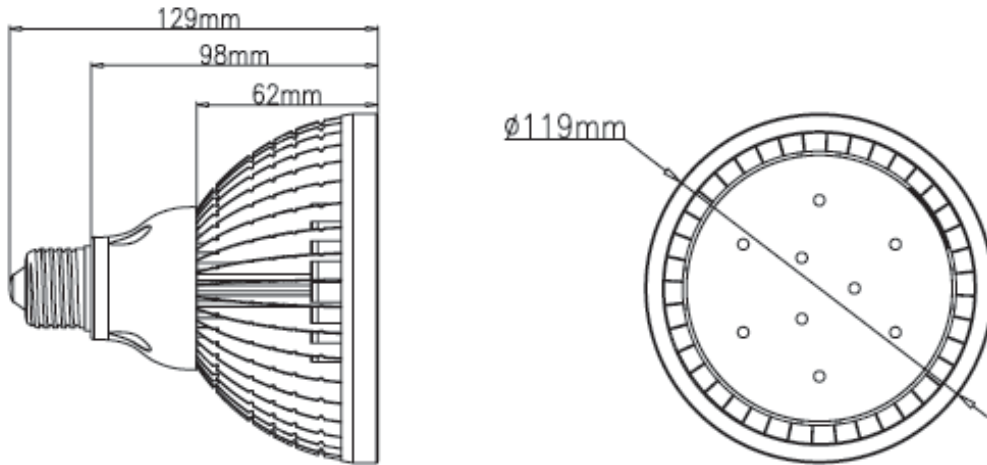

6. Intramural electro circuit:



7. Driving(test) circuit:

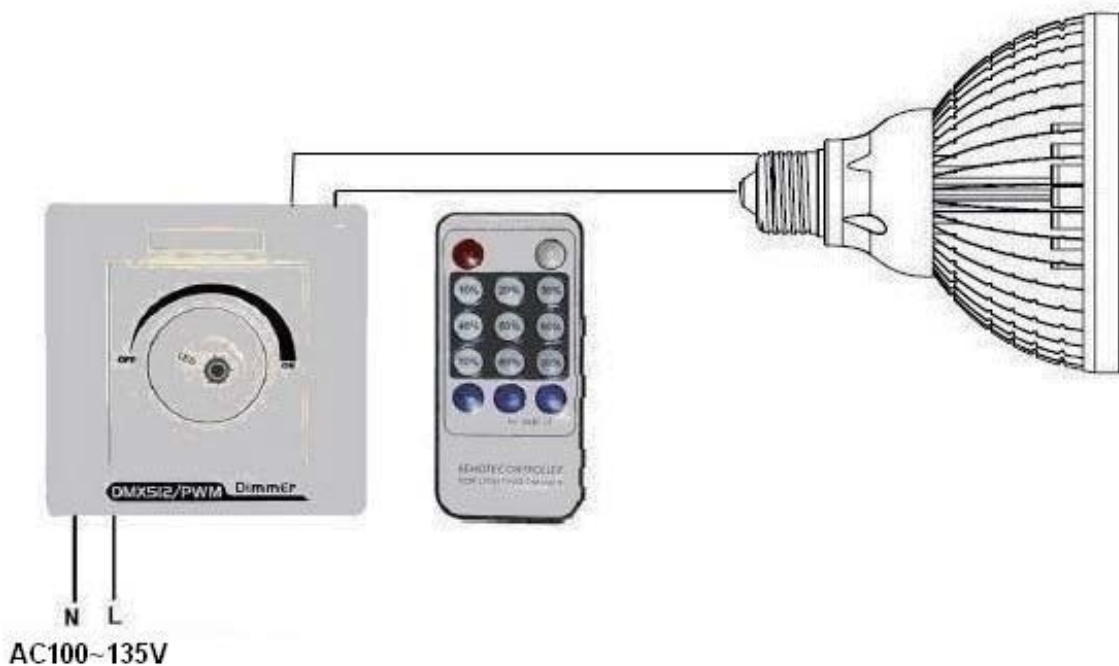



8. Technical data:

Parameter	symbol	Data	Unit
Size	Ø x H	Ø119xH129	MM
* Luminous Flux(16w)	Flux	1000~1200	Lm
* Color Temperature (16w)	Tc	W: 2900-3200 (Warm White) N: 3700-4200 (Natural White) P: 4700-5300 (Pure White) C: 5700-6500 (Cool White)	K
* Color Rendering Index(16w)	Ra	> 70	--
LED Type/Q'ty	--	9x2W	--
Beam Angle	--	25, 40, 60	Deg(°)
Input Voltage	V	AC100~135V	--
Power Range	W	0-16	W
Dimming Method	--	TRIAC	--
Base	--	E26	--
Working temperature	Top	-20~+40	°C
Outer Housing Material	--	Aluminum +PC	--
Gross Weight	G.W.	520	G

9. Cautions:

- The working input voltage for this product is AC100 -135V, please ensure the right voltage before running, wrong voltage may cause permanent damage.
- To prevent electric shock, do not touch the metal parts on the ends after connecting electricity.
- Please check it before using, if there are any breakages, please notify your supplier.
- Do not touch the light when it's working.
- Shut off the power before replacing the light.
- Indoor use only.

10. Packing:

Packaging: 1pc/ Unit packing→30pcs/Ocean shipping carton
Unit packing: 125x125x165mm
Ocean shipping carton: 640x390x350mm

Colorful package available!